

# KENAR BANTLAMA MAKİNALARI / EDGE BANDING MACHINES

## BANTMATİK 436 KENAR BANTLAMA MAKİNASI BANTMATİK 436 EDGE BANDING MACHINE




MAKİNAMIZIN BOYU DIŞTAN İKİ KAPAK ARASI 4,3 METREDİR. PLC PANO KONTROLLÜDÜR. 6 ADET ÜNİTE İÇERMEKTEDİR. PALET HIZI 15 METRE / DAKİKADIR.

MACHINE LENGTH 4,3 METERS FROM RIGHT TO LEFT DOOR. IT HAS PLC CONTROL PANEL AND 6 UNITS. WORKING SPEED 15 METER/MINUTE.

MAKİNALARIMIZ İÇİN UYGUN KAPASİTEDE HAVA KURUTUCULU KOMPRESÖR, TOZEMME MAKİNASI VE REGÜLATÖR KULLANILMALIDIR. KURULUM, BAKIM VE ONARIM ÇALIŞMALARI FİRMAMIZ TEKNİK PERSONELİ TARAFINDAN YAPILMALIDIR. BU ŞARTLARIN SAĞLANMAMASI DURUMUNDA MAKİNANIZIN ÇALIŞMA ÖMRÜ KISALACAK VE GARANTİ KAPSAMI DIŞINA ÇIKACAKTIR.

AIR COMPRESOR WITH AIR DRYER, DUST SUCTION MACHINE AND REGULATOR MUST BE USED FOR MACHINE. START-UP, INSTALLATION AND MAINTENANCE SHOULD BE DONE FROM UNVER WOODWORKING MACHINERY QUALIFIED TECHNICIANS. IF YOU DONT OBEY CONDITIONS, YOUR MACHINE LIFESPAN WILL SHORTEN. IT WILL NOT INCLUDED WARRANTY.

### BANTMATİK 436 ÇALIŞMA ALANI / WORKING AREA

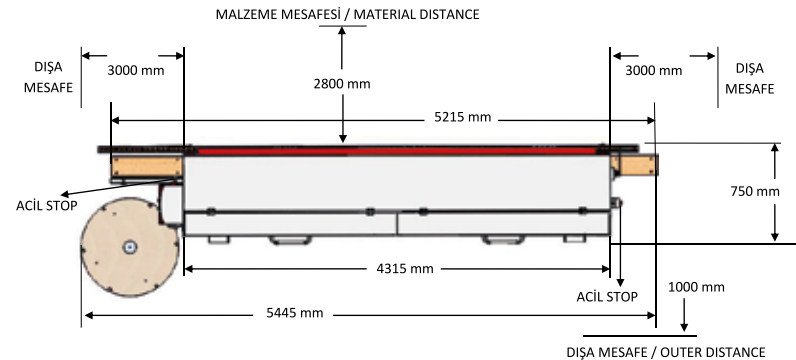

KUMANDA PANELİ  
CONTROL PANEL



ÖN FREZE  
PRE - MILLING



İNFRARED ISITICI  
INFRARED HEATING



TUTKAL KAZANI  
GLUE UNIT



BASKI GRUBU  
PRESS UNIT



BAŞ SON KESME  
END MILLING



ALT ÜST FREZE  
BOTTOM & TOP MILLING



R2 KAZIMA  
R2 SCRAPING



POLİSAJ  
BUFFER



TOZ EMME ÜNİTESİ  
DUST SUCTION

### TEKNİK ÖZELLİKLER TECHNICAL INFORMATIONS

### BANTMATİK 436 TR-PC

<b>PANEL SIKMA KALINLIĞI</b> MAXIMUM PANEL THICKNESS	8 MM / 60 MM.
<b>BANT KALINLIĞI</b> BAND THICKNESS	0,4 MM / 5 MM.
<b>MİNİMUM PANEL BOYU</b> MINIMUM PANEL LENGTH	120 MM
<b>MİNİMUM PANEL GENİŞLİĞİ</b> MINIMUM PANEL WIDTH	100 MM
<b>TUTKAL HAZNESİ</b> GLUE CAPACITY	3 LT / 4 KG.
<b>TUTKALIN ISINMA SÜRESİ</b> GLUE HEATING TIME	20-25 DAKİKA (MINUTE)
<b>MAKİNANIN ÇALIŞMA HIZI</b> WORKING SPEED	15 MET/ DAK (M/MIN)
<b>ÖN FREZE MOTORLARI (2 ADET)</b> FRONT MILLING CUTTER MOTORS (2 PIECES)	2,2 KW 12.000 D/D (R.P.M)
<b>BAŞ - SON KESME MOTORLARI (2 ADET)</b> END MILLING CUTTER MOTORS (2 PIECES)	0,37 KW 12.000 D/D (R.P.M)
<b>ALT-ÜST FREZE MOTORLARI (2 ADET)</b> BOTTOM-TOP MILLING CUTTER MOTORS (2 PIECES)	0,55 KW 18.000 D/D (R.P.M)
<b>POLİSAJ MOTORLARI ( 2 ADET )</b> BUFFER MOTORS (2 PIECES)	0,25 KW / 3.000 D/D (R.P.M)
<b>TOZ EMME FAN VE MOTORU</b> DUST SUCTION MOTOR	1,5 KW 1.600 M3
<b>KURULUM GÜCÜ</b> POWER	12 KW
<b>ÇEKİLEN GERİLİM</b> VOLTAGE	380 - 400 V / 50-60 HZ
<b>ÇEKİLEN AKIM</b> CURRENT	32 AMPER
<b>ÇALIŞMA BASINCI</b> WORKING PRESSURE	4/6 BAR
<b>SEVKİYAT ÖLÇÜLERİ BOY - EN - YÜKSEKLİK</b> TRANSPORTATION DIMENSIONS LENGHT - WIDTH - HEIGHT	5.2 X 0.75 X 1.5 M
<b>TAKRİBİ AĞIRLIK</b> WEIGHT	1.650 ± 30 KG